

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number
WO 2004/086371 A1

(51) International Patent Classification⁷: **G11B 7/004**

(74) Agent: **PARK, Lae Bong**; 1Fl., Dongun Bldg., 413-4, Dogok 2-dong, Kangnam-gu, Seoul 135-272 (KR).

(21) International Application Number:
PCT/KR2004/000289

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 13 February 2004 (13.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2003-0018416 25 March 2003 (25.03.2003) KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-010 (KR).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

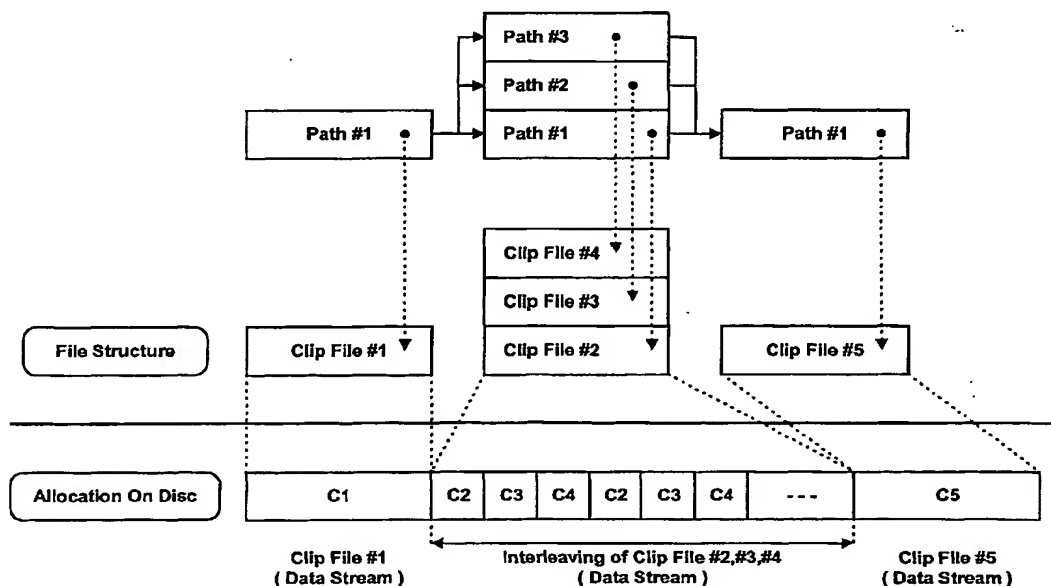
(75) Inventors/Applicants (for US only): **SEO, Kang Soo** [KR/KR]; 606-503, Chowon Hanyang Apt., 897-5, Pyoungan-dong, Dongan-gu, Anyang, Kyunggi-do 431-075 (KR). **KIM, Byung Jin** [KR/KR]; 111-204, Hansol Chungu APT., 110, Jeongja-dong, Bundang-gu, Sungnam, Kyunggi-do 463-010 (KR).

Published:

— with international search report

[Continued on next page]

(54) Title: RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING REPRODUCTION OF DATA STREAMS RECORDED THEREON AND RECORDING AND REPRODUCING METHODS AND APPARATUSES



(57) Abstract: The data structure includes a navigation area of the recording medium storing navigation data associated with a data stream representing a portion of the title. The navigation data indicates whether the data stream for the portion of the title represents multiple reproduction paths. The navigation data may further indicate a number of the reproduction paths represented by the data stream when the data stream represents multiple reproduction paths.

WO 2004/086371 A1

WO 2004/086371 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION

RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING REPRODUCTION OF DATA STREAMS RECORDED THEREON AND RECORDING AND REPRODUCING METHODS AND APPARATUSES

5

1. TECHNICAL FIELD

The present invention relates to a recording medium having a data structure for managing reproduction of data streams recorded thereon as well as methods and apparatuses for reproduction and
10 recording.

2. BACKGROUND ART

The standardization of new high-density read only and rewritable optical disks capable of recording large amounts of high-quality video and audio data has been progressing rapidly and
15 new optical disk related products are expected to be commercially available on the market in the near future. The Blu-ray Disc Rewritable (BD-RE) is one example of these new optical disks.

Fig. 1 illustrates the file structure of the BD-RE. The file structure or data structure provides for managing the reproduction
20 of the video and audio data recorded on the BD-RE. As shown, the data structure includes a root directory that contains at least one BDAV directory. The BDAV directory includes files such as 'info.bdav', 'menu.tidx', and 'mark.tidx', a PLAYLIST subdirectory in which playlist files (*.rpls and *.vpls) are stored,
25 a CLIPINF subdirectory in which clip information files (*.clpi) are stored, and a STREAM subdirectory in which MPEG2-formatted A/V stream clip files (*.m2ts) corresponding to the clip information files are stored. In addition to illustrating the data structure of the optical disk, Fig. 1 represents the areas of the optical

disk. For example, the general information file info.bdav is stored in a general information area or areas on the optical disk.

Because the BD-RE data structure and disk format as illustrated in Fig. 1 is well-known and readily available, only
5 a brief overview of the file structure will be provided in this disclosure.

As alluded to above, the STREAM directory includes MPEG2-formatted A/V stream files called clip files. The STREAM directory may also include a special type of clip referred to as
10 a bridge-clip A/V stream file. A bridge-clip file is used for making seamless connection between two or more presentation intervals selected in the clip files, and generally have a small data size compared to clip files. The A/V stream includes source packets of video and audio data. For example, a source packet of video data
15 includes a header and a transport packet. A source packet includes a source packet number, which is generally a sequentially assigned number that serves as an address for accessing the source packet. Transport packets include a packet identifier (PID). The PID identifies the sequence of transport packets to which a transport
20 packet belongs. Each transport packet in the sequence will have the same PID.

The CLIPINF directory includes a clip information file associated with each A/V stream file. The clip information file indicates, among other things, the type of A/V stream associated
25 therewith, sequence information, program information and timing information. The sequence information describes the arrival time basis (ATC) and system time basis (STC) sequences. For example, the sequence information indicates, among other things, the number of sequences, the beginning and ending time information for each
30 sequence, the address of the first source packet in each sequence and the PID of the transport packets in each sequence. A sequence of source packets in which the contents of a program is constant is called a program sequence. The program information indicates,

among other things, the number of program sequences, the starting address for each program sequence, and the PID(s) of transport packets in a program sequence.

The timing information is referred to as characteristic point
5 information (CPI). One form of CPI is the entry point (EP) map. The EP map maps a presentation time stamp (e.g., on an arrival time basis (ATC) and/or a system time basis (STC)) to a source packet address (i.e., source packet number). The presentation time stamp (PTS) and the source packet number (SPN) are related to an entry
10 point in the AV stream; namely, the PTS and its related SPN point to an entry point on the AV stream. The packet pointed to is often referred to as the entry point packet.

The PLAYLIST directory includes one or more playlist files. The concept of a playlist has been introduced to promote ease of
15 editing/assembling clips for playback. A playlist file is a collection of playing intervals in the clips. Each playing interval is referred to as a playitem. The playlist file, among other things, identifies each playitem forming the playlist, and each playitem, among other things, is a pair of IN-point and OUT-point that point
20 to positions on a time axis of the clip file (e.g., presentation time stamps on an ATC or STC basis). Expressed another way, the playlist file identifies playitems, each playitem points to a clip file or portion thereof and identifies the clip information file associated with the clip file. The clip information file is used,
25 among other things, to map the playitems to the clip of source packets.

A playlist directory may include real playlists (*.rpls) and virtual playlists (*.vpls). A real playlist can only use clips and not bridge-clips. Namely, the real playlist is considered as
30 referring to parts of clips, and therefore, conceptually considered equivalent in disk space to the referred to parts of the clips. A virtual playlist can use both clips and bridge-clips, and therefore, the conceptual considerations of a real playlist

do not exist with virtual playlists.

The info.bdav file is a general information file that provides general information for managing the reproduction of the A/V stream recorded on the optical disk. More specifically, the
5 info.bdav file includes, among other things, a table of playlists that identifies the file names of the playlist in the PLAYLIST directory of the same BDAV directory.

The menu.tidx, menu.tdt1 and menu.tdt2 files store information related to menu thumbnails. The mark.tidx, mark.tdt1
10 and mark.tdt2 files store information that relates to mark thumbnails. Because these files are not particularly relevant to the present invention, they will not be discussed further.

The standardization for high-density read-only optical disks such as the Blu-ray ROM (BD-ROM) is still under way. An effective
15 data structure for managing data streams, which may represent one or more reproduction paths, recorded on the high-density read-only optical disk such as a BD-ROM is not yet available.

3. DISCLOSURE OF INVENTION

The recording medium according to the present invention
20 includes a data structure for managing reproduction of data streams, which may represent one or more reproduction paths (e.g., multiple camera angles), recorded on the recording medium.

In one exemplary embodiment, navigation data is stored in a navigation area of the recording medium. The navigation data is
25 associated with a data stream representing at least a portion of a title, and the navigation data indicates whether the data stream for the portion of the title represents multiple reproduction paths.

In an exemplary embodiment, the navigation data further
30 indicates a number of the reproduction paths represented by the data stream when the data stream represents multiple reproduction paths.

In association with the above embodiments, another

embodiment provides a data area for storing clip files of the data stream such that each clip file represents one of the multiple reproduction paths of the portion when the navigation data indicates the data stream for the portion represents multiple reproduction paths.

In another embodiment, a data area of the recording medium stores clip files of a data stream representing multiple reproduction paths of a multiple reproduction path portion of a title. Here, each clip file is associated with a different one of the multiple reproduction paths, and the clip files are stored interleaved with one another.

In yet another embodiment, a data area of the recording medium stores a clip file of the data stream for each reproduction path of a title such that where the reproduction paths represent a same portion of the title, the portions of the clip files representing the same portion of the title are interleaved.

In association with the two previously described embodiments, an exemplary embodiment of the present invention further provides a navigation area storing navigation data. The navigation data indicates that the multiple reproduction path portion of the title has multiple reproduction paths. The navigation data may further indicate a number of the reproduction paths for the multiple reproduction path portion of the title.

The present invention further provides apparatuses and methods for recording and reproducing the data structure according to the present invention, and recording and reproducing data streams according to the present invention.

4. BRIEF DESCRIPTION OF DRAWINGS

The above features and other advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

Fig. 1 illustrates the prior art file or data structure of a rewritable optical disk according to the Blu-ray Disc Rewritable (BD-RE) standard;

Fig. 2 illustrates an exemplary embodiment of a recording medium file or data structure according to the present invention;

Fig. 3 illustrates an example of a recording medium having the data structure of Fig. 2 stored thereon;

Figs. 4-6 each illustrate a detailed embodiment of portions of the data structure in Fig. 1 and a method for managing still images of a high-density recording medium according to the present invention;

Fig. 7 illustrates a block diagram of an optical disc reproducing apparatus where the present invention is applied; and

Fig. 8 illustrates an embodiment of a recording and reproducing apparatus according to the present invention.

5. MODES FOR CARRYING OUT THE INVENTION

In order that the invention may be fully understood, exemplary embodiments thereof will now be described with reference to the accompanying drawings.

A high-density recording medium such as a high density optical disk, for example, a Blu-Ray ROM (BD-ROM), BD-RE, etc. in accordance with the invention may have a file or data structure for managing reproduction of video and audio data as shown in Fig. 2. Some aspects of the data structure according to the present invention shown in Fig. 2 are the same as the well-known BD-RE standard, as such these aspects will be reviewed, but not described in great detail.

As shown in Fig. 2, the root directory contains at least one BD directory. The BD directory includes general files (not shown), a PLAYLIST directory in which playlist files (e.g., *.mpls) are stored, a CLIPINF directory in which clip information files (*.clpi) are stored, and a STREAM directory in which

MPEG2-formatted A/V stream clip files (*.m2ts), corresponding to the clip information files, are stored.

The STREAM directory includes MPEG2-formatted A/V stream files called clip streams files or just clip files. The A/V stream includes source packets of video and audio data. For example, a source packet of video data includes a header and a transport packet. A source packet includes a source packet number, which is generally a sequentially assigned number that serves as an address for accessing the source packet. Transport packets include a packet identifier (PID). The PID identifies the sequence of transport packets to which a transport packet belongs. Each transport packet in the sequence will have the same PID.

The CLIPINF directory includes a clip information file associated with each A/V stream file. The clip information file indicates, among other things, the type of A/V stream associated therewith, sequence information, program information and timing information. The sequence information describes the arrival time basis (ATC) and system time basis (STC) sequences. For example, the sequence information indicates, among other things, the number of sequences, the beginning and ending time information for each sequence, the address of the first source packet in each sequence and the PID of the transport packets in each sequence. A sequence of source packets in which the contents of a program is constant is called a program sequence. The program information indicates, among other things, the number of program sequences, the starting address for each program sequence, and the PID(s) of transport packets in a program sequence.

The timing information is referred to as characteristic point information (CPI). One form of CPI is the entry point (EP) map. The EP map maps a presentation time stamp (e.g., on an arrival time basis (ATC) and/or a system time basis (STC)) to a source packet address (i.e., source packet number). The presentation time stamp (PTS) and the source packet number (SPN) are related to an entry

point in the AV stream; namely, the PTS and its related SPN point to an entry point on the AV stream. The packet pointed to is often referred to as the entry point packet.

The PLAYLIST directory includes one or more playlist files.

5 The concept of a playlist has been introduced to promote ease of editing/assembling clips (clip file and associated clip information file) for playback. A playlist file is a collection of playing intervals in the clip files. Each playing interval is referred to as a playitem. The playlist file, among other things,

10 identifies each playitem forming the playlist, and each playitem, among other things, is a pair of IN-point and OUT-point that point to positions on a time axis of the clip file (e.g., presentation time stamps on an ATC or STC basis). The playlist file may also include sub-playitems that also provide a pair of IN-point and

15 OUT-point that point to positions on a time axis of a clip file. Expressed another way, the playlist file identifies playitems and sub-playitems, each playitem or sub-playitem points to a clip file or portion thereof and identifies the clip information file associated with the clip file. The clip information file is used,

20 among other things, to map the playitems to the clip file of source packets. Playlists may also include playlist marks which point to specific places (e.g., a specific address) in a clip file

The general information files (not shown) provide general information for managing the reproduction of the A/V streams

25 recorded on the optical disk.

In addition to illustrating the data structure of the recording medium according to an embodiment of the present invention, Fig. 2 represents the areas of the recording medium. For example, the general information files are recorded in one or

30 more general information areas, the playlist directory is recorded in one or more playlist directory areas, each playlist in a playlist directory is recorded in one or more playlist areas of the recording medium, etc. Fig. 3 illustrates an example of a recording medium

having the data structure of Fig. 2 stored thereon. As shown, the recording medium includes a file system information area, a data base area and an A/V stream area. The data base area includes a general information file and playlist information area and a clip
5 information area. The general information file and playlist information area have the general information files recorded in a general information file area thereof, and the PLAYLIST directory and playlist files recorded in a playlist information area thereof. The clip information area has the CLIPINFO directory and associated
10 clip information files recorded therein. The A/V stream area has the A/V streams for the various titles recorded therein.

Video and audio data are typically organized as individual titles; for example, different movies represented by the video and audio data are organized as different titles. Furthermore, a title
15 may be organized into individual chapters in much the same way a book is often organized into chapters.

Because of the large storage capacity of the newer, high-density recording media such as BD-ROM and BD-RE optical disks, different titles, various versions of a title or portions of a title
20 may be recorded, and therefore, reproduced from the recording media. For example, video data representing different camera angles may be recorded on the recording medium. As another example, versions of title or portions thereof associated with different languages may be recorded on the recording medium. As a still further example,
25 a director's version and a theatrical version of a title may be recorded on the recording medium. Or, an adult version, young adult version and young child version (i.e., different parental control versions) of a title or portions of a title may be recorded on the recording medium. Each version, camera angle, etc. represents a
30 different reproduction path, and the video data in these instances is referred to as multiple reproduction path video data.

In a first embodiment of the present invention, data streams are managed as clip files, and each clip file is associated with

a portion of a title. When a portion of the title has multiple reproduction paths, the clip files associated with the multiple reproduction path portion of the title are recorded in an interleaved fashion on the recording medium. Figs. 4 illustrates an example of a data structure and method for managing data streams of a high-density recording medium such as a BD-ROM according to this first embodiment. Fig. 4 illustrates a title having three portions; however, it will be understood that the present invention is not limited to having this number of portions. The first portion has a single, first reproduction path Path #1. The second portion has multiple reproduction paths; namely, the first reproduction path Path #1, a second reproduction path Path #2 and a third reproduction path Path #3. The third portion has a single reproduction path - the first reproduction path Path #1. The first reproduction path Path #1 is present in all three portions and may be thought of as a main reproduction path.

As further shown in Fig. 4, the data stream representing the first portion of the title, having the first reproduction path Path #1, is managed as a first clip file Clip File #1. The data streams representing the first, second and third reproduction paths Paths #1, #2 and #3 of the second portion of the title are managed as second, third and fourth clip files #2, #3 and #4, respectively. The data stream representing the third portion of the title, having the first reproduction path Path #1, is managed as a fifth clip file Clip File #5.

Fig. 4 further illustrates the allocation of the clip files on a data area of the BD-ROM. As shown, the first clip file Clip File #1 is recorded. Then, the second, third and fourth clip files Clip Files #2, #3 and #4 representing the multiple reproduction path portion of the title are recorded in interleaved fashion on the recording medium to permit seamless playback of any one of the reproduction paths. Subsequently, the fifth clip file Clip File #5 is recorded.

When it is unnecessary to perform seamless reproduction of the multiple reproduction path data streams, the data streams of the second, third, and fourth clip files Clip Files #2, #3 and #4 may be sequentially recorded clip file by clip file in a
5 non-interleaved fashion.

During reproduction, the first, second, and fifth clip files Clip Files #1, #2 and #5 are selectively reproduced when a reproduction operation is carried out for the first reproduction path Path #1. When the second reproduction path is reproduced, the
10 first, third, and fifth clip files Clip Files #1, #3 and #5 are selectively reproduced. And when the third reproduction path is reproduced, the first, fourth and fifth clip files Clip Files #1, #4 and #5 are selectively reproduced.

In order to assist achieving a seamless reproduction of the
15 multiple reproduction path data streams, as described above, the data stream corresponding to the trailing end of the first clip file Clip File #1 and the data stream corresponding to the leading end of the interleaved second, third and fourth clip files #2, #3 and #4 are recorded adjacent to each other. Also, the data stream
20 corresponding to the trailing end of the interleaved second, third and fourth clip files #2, #3 and #4 and the data stream corresponding to the leading end of the fifth clip file Clip File #5 are recorded adjacent to each other.

A second embodiment of the present invention is the same as
25 the first embodiment described above, except that each reproduction path of the title is managed as a single clip file. Fig. 5 illustrates an example of this embodiment for the same title structure discussed above with respect to Fig. 4. As shown, the first reproduction path Path #1 is present in each of the three
30 portions of the title, and the data stream of this reproduction path is managed as a single, first clip file Clip File #1. Again, the first reproduction path Path #1 may be thought of as a main reproduction path. The second portion of the title includes a

second reproduction path Path #2 and a third reproduction path Path #3. The data streams of each of these reproduction paths are managed as individual clip files, second clip file Clip File #2 and third clip file Clip File #3, respectively.

5 In this embodiment, the clip files are recorded on the BD-ROM such that where the reproduction paths, and therefore at least portions of the clip files, represent the same portion of the title, the portions of the clip files representing that multiple reproduction path portion are recorded in an interleaved fashion. 10 Accordingly, as shown in Fig. 5, the portion of the first clip file Clip File #1 associated with the second, multiple reproduction path portion of the title is recorded in interleaved fashion with the second and third clip files Clip Files #2 and #3, which also represent the second portion of the title.

15 According to a further embodiment of the present invention, navigation data associated with the data stream representing each portion of the title may be recorded on the recording medium. The navigation data indicates whether associated data stream for the associated portion of the title is interleaved clip files; and 20 therefore, indicates whether the data stream represents a multiple reproduction path portion of the title. The navigation data may also indicate the number of reproduction path represented by the associated data stream. Fig. 6 illustrates an example of this navigation data for the data structure illustrated and described 25 above with respect to Fig. 5.

As shown in Fig. 6, a clip information file for clip file Clip File #1 of the main reproduction path includes the navigation data. Specifically, the clip information file includes interleaving sequence information ILV_Sequence for the data stream representing 30 each portion of the title. The interleaving sequence information includes identification information Interleaving_Flag identifying an interleaved state of the associated data stream. Namely, the interleaving flag indicates whether the data stream

represents the associated portion of the title is interleaved clip files or not. The interleaving sequence information also includes path number information `Number_of_Path` indicating the number of reproduction paths represented by the associated data stream.

5 As shown in Fig. 6, first, second, and third interleaving sequences ILV Sequences #1, #2 and #3 associated with the data streams representing the first, second and third portions of the title, respectively, are included in the first clip information file. The first interleaving sequence ILV_Sequence #1 is recorded
10 with "`Interleaving_Flag = 0`" indicating a non-interleaved state of the data stream (and thus a single reproduction path of data) and "`Number_of_Path = 1`" explicitly indicating that the data stream of the first portion of the title represents one reproduction path.

The second interleaving sequence ILV_Sequence #2 is recorded
15 with "`Interleaving_Flag = 1`" indicating an interleaved state of the data stream (and thus multiple reproduction paths), and "`Number_of_Path = 3`" indicating that the data streams of the second portion of the title represent three reproduction paths. The third interleaving sequence ILV_Sequence #3 is recorded with
20 "`Interleaving_Flag = 0`" indicating a non-interleaved state of the data stream (and thus a single reproduction path of data) and "`Number_of_Path = 1`" explicitly indicating that the data stream of the third portion of the title represent one reproduction path.

Fig. 7 illustrates an embodiment of an optical disk
25 reproducing apparatus according to the present invention. As shown, the optical disk reproducing apparatus includes an optical pickup 111, a drive 112, a source depacketizer 113, a demultiplexer 114, a controller 115, an A/V decoder 116, and a memory 117. The drive 112 drives the optical pick-up to reproduce data from an optical
30 disk 110. The drive 112 is controlled by the controller 115. During reproduction, the controller 115 controls the drive 112 to reproduce the data structure of one of the above-described embodiments. Based on the information contained therein, as well

as user input received over a user interface (e.g., control buttons on the reproducing apparatus or a remote associated with the apparatus), the controller 115 controls the drive 112 to reproduce the data from the optical disk.

5 Reproduced source packets are received by the source depacketizer 113 and converted into a data stream (e.g., an MPEG-2 transport packet stream). The demultiplexer 115 demultiplexes the data stream into navigation/management and encoded AV data. The navigation/management data is sent to the controller 115 and stored
10 in the memory 117. The AV decoder 116 decodes the encoded AV data to produce the originally recorded data. During reproduction, the controller 115 controls the operation of the source depacketizer 113, demultiplexer 114 and AV decoder 116.

 An example of the operation of the optical disk reproducing
15 apparatus will be described for the data structure illustrated in Fig. 6. Assume, a user requests reproduction of the data streams of the first path Path #1 via the user interface. In response, the controller 115 controls operations of the drive 112, source depacketizer 113, demultiplexer 114, and A/V decoder 116, based
20 on the data structure.

 Specifically, the controller 115 obtains the ILV sequence information for the first portion of the title. Here, the "Interleaving_Flag = 0" and "Number_of_Path = 1", and the controller 115 determines that the associated data stream
25 represents a single reproduction path of non-interleaved data. As such the controller 115 knows that the data stream represents the first or main reproduction path Path #1. Accordingly, the controller 115 reads out and reproduces the data stream of the first (main) reproduction path Path #1 recorded in the region associated
30 with the first interleaving sequence information. Thereafter, the controller 115 obtains the ILV sequence information for the second portion of the title. Here, the controller 115 obtains an "Interleaving_Flag = 1" and "Number_of_Path = 3", and determines

that the data streams for the second portion of the title represent three reproduction paths and the clip files associated therewith are interleaved as shown in Fig. 6. Namely, the controller 115 knows the first block of interleaved data is for the first reproduction path Path #1, the second block is for the second reproduction path Path #2, the third block is for the third reproduction path Path #3, the fourth block is for the first reproduction path Path #1, etc. Accordingly, the controller 115 selectively reproduces only the blocks associated with the first reproduction path Path #1.

10 Alternatively or additionally, the clip information file may indicate the file extent or physical position of each block for each reproduction path on the recording medium, and the blocks for the selected reproduction path are reproduced based on the file extent information.

15 Subsequently, the controller 115 obtains the ILV sequence information for the third portion of the title. Here, the "Interleaving_Flag = 0" and "Number_of_Path = 1", and the controller 115 determines that the associated data stream represents a single reproduction path of non-interleaved data. As such the controller 115 knows that the data stream represents the first or main reproduction path Path #1. Accordingly, the controller 115 reads out and reproduces the data stream of the first (main) reproduction path Path #1 recorded in the region associated with the third interleaving sequence information.

25 Another example of the operation of the optical disk reproducing apparatus will be described for the data structure illustrated in Fig. 6. Assume, a user requests reproduction of the data stream of the second path Path #2 via the user interface. In response, the controller 115 controls operations of the drive 112, source depacketizer 113, demultiplexer 114, and A/V decoder 116,

30 based on the data structure.

Specifically, the controller 115 obtains the ILV sequence information for the first portion of the title. Here, the

"Interleaving_Flag = 0" and "Number_of_Path = 1", and the controller 115 determines that the associated data stream represents a single reproduction path of non-interleaved data. As such the controller 115 knows that the data stream represents the first or main reproduction path Path #1. Accordingly, the controller 115 reads out and reproduces the data stream of the first (main) reproduction path Path #1 recorded in the region associated with the first interleaving sequence information because the data stream associated with the second reproduction path Path #2 is understood not to be present. Thereafter, the controller 115 obtains the ILV sequence information for the second portion of the title. Here, the controller 115 obtains an "Interleaving_Flag = 1" and "Number_of_Path = 3", determines that the data stream for the second portion of the title represents three reproduction paths, and determines that the clip files associated therewith are interleaved as shown in Fig. 6. Namely, the controller 115 knows the first block of interleaved data is for the first reproduction path Path #1, the second block is for the second reproduction path Path #2, the third block is for the third path reproduction Path #3, the fourth block is for the first reproduction path Path #1, etc. Accordingly, the controller 115 selectively reproduces only the blocks associated with the second reproduction path Path #2. Alternatively or additionally, the clip information file may indicate the file extent or physical position of each block for each reproduction path on the recording medium, and the blocks for the selected reproduction path are reproduced based on the file extent information.

Subsequently, the controller 115 obtains the ILV sequence information for the third portion of the title. Here, the "Interleaving_Flag = 0" and "Number_of_Path = 1", and the controller 115 determines that the associated data stream represents a single reproduction path of non-interleaved data. As such the controller 115 knows that the data stream represents the

first or main reproduction path Path #1. Accordingly, the controller 115 reads out and reproduces the data stream of the first (main) reproduction path Path #1 recorded in the region associated with the third interleaving sequence information because the data stream associated with the second reproduction path Path #2 is understood not to be present.

Fig. 8 illustrates a schematic diagram of an embodiment of an optical disk recording and reproducing apparatus according to the present invention. As shown, an AV encoder 9 receives and encodes data (e.g., still image data, audio data, etc.). The AV encoder 9 outputs the encoded data along with coding information and stream attribute information. A multiplexer 8 multiplexes the encoded data based on the coding information and stream attribute information to create, for example, an MPEG-2 transport stream. A source packetizer 7 packetizes the transport packets from the multiplexer 8 into source packets in accordance with the audio/video format of the optical disk. As shown in Fig. 8, the operations of the AV encoder 9, the multiplexer 8 and the source packetizer 7 are controlled by a controller 10. The controller 10 receives user input on the recording operation, and provides control information to AV encoder 9, multiplexer 8 and the source packetizer 7. For example, the controller 10 instructs the AV encoder 9 on the type of encoding to perform, instructs the multiplexer 8 on the transport stream to create, and instructs the source packetizer 7 on the source packet format. The controller 10 further controls a drive 3 to record the output from the source packetizer 7 on the optical disk.

The controller 10 also creates the navigation and management information for managing reproduction of the data being recorded on the optical disk. For example, based on information received via the user interface (e.g., instruction set saved on disk, provided over an intranet or internet by a computer system, etc.) the controller 10 controls the drive 3 to record one or more of

the data structures of Figs. 2-6 on the optical disk.

During reproduction, the controller 10 controls the drive 3 to reproduce this data structure. Based on the information contained therein, as well as user input received over the user interface (e.g., control buttons on the recording and reproducing apparatus or a remote associated with the apparatus), the controller 10 controls the drive 3 to reproduce the data from the optical disk.

The reproduced source packets are received by a source depacketizer 4 and converted into a data stream (e.g., an MPEG-2 transport packet stream). A demultiplexer 5 demultiplexes the data stream into encoded data. An AV decoder 6 decodes the encoded data to produce the original data that was feed to the AV encoder 9. During reproduction, the controller 10 controls the operation of the source depacketizer 4, demultiplexer 5 and AV decoder 6. The controller 10 receives user input on the reproducing operation, and provides control information to AV decoder 6, demultiplexer 5 and the source packetizer 4. For example, the controller 10 instructs the AV decoder 9 on the type of decoding to perform, instructs the demultiplexer 5 on the transport stream to demultiplex, and instructs the source depacketizer 4 on the source packet format.

While Fig. 8 has been described as a recording and reproducing apparatus, it will be understood that only a recording or only a reproducing apparatus may be provided using those portions of Fig. 8 providing the recording or reproducing function.

The data structure for and method for managing data streams on a high-density optical disk in accordance with embodiments of the present invention allows effective selection and reproduction of data streams recorded on a high density recording medium such as a BD-ROM.

As apparent from the above description, the present invention provides methods and apparatuses for recording a data structure

on a high density recording medium for managing data streams recorded on the recording medium.

The above description further provides methods and apparatus for reproducing data streams recorded on a high density recording
5 medium based on a data structure, also recorded on the high density recording medium, for managing the reproduction of data streams.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art, having the benefit of this disclosure, will appreciate numerous
10 modifications and variations there from. For example, while described with respect to a Blu-ray ROM optical disk in several instances, the present invention is not limited to this standard of optical disk or to optical disks. It is intended that all such modifications and variations fall within the spirit and scope of
15 the invention.

CLAIMS

1. A recording medium having a data structure for managing a data stream representing a title, comprising:

a navigation area storing navigation data associated with a data stream representing a portion of the title, the navigation data indicating whether the data stream for the portion of the title represents multiple reproduction paths.

2. The recording medium of claim 1, wherein the navigation data further indicates a number of the reproduction paths represented by the data stream when the data stream represents multiple reproduction paths.

3. The recording medium of claim 2, further comprising: a data area storing clip files of the data stream, each clip file representing one of the multiple reproduction paths of the portion of the title when the navigation data indicates the data stream for the portion represents multiple reproduction paths.

4. The recording medium of claim 3, wherein the multiple reproduction paths include multiple camera angles of video data.

5. The recording medium of claim 1, further comprising: a data area storing clip files of the data stream, each clip file representing one of the multiple reproduction paths of the portion of the title when the navigation data indicates the data stream for the portion represents multiple reproduction paths.

6. A recording medium having a data structure for managing a data stream representing multiple reproduction paths of at least a portion of a title, comprising:

a data area storing clip files of the data stream representing the multiple reproduction paths of the multiple reproduction path portion of the title, each clip file associated with a different one of the multiple reproduction paths, and the clip files being stored interleaved with one another.

7. The recording medium of claim 6, further comprising:
a navigation area storing navigation data, the navigation data indicating that the multiple reproduction path portion of the title has multiple reproduction paths.

5 8. The recording medium of claim 7, wherein the navigation data further indicates a number of the reproduction paths for the multiple reproduction path portion of the title when the multiple reproduction path portion of the title has multiple reproduction paths.

10 9. The recording medium of claim 8, wherein the navigation data is associated with at least one of the clip files.

10. The recording medium of claim 8, wherein the multiple reproduction paths include multiple camera angles of video data.

11. The recording medium of claim 6, further comprising:
15 a navigation area storing navigation data, the navigation data indicating a number of the reproduction paths for the multiple reproduction path portion of the title.

12. The recording medium of claim 6, wherein one of the clip files represents a main reproduction path and represents at least
20 one of a prior and subsequent portion of the title with respect to the multiple reproduction path portion.

13. The recording medium of claim 6, wherein the data area further stores another clip file representing a single reproduction path portion of the title at least one of prior and
25 subsequent to the multiple reproduction path portion.

14. The recording medium of claim 6, wherein the multiple reproduction paths include multiple camera angles of video data.

15. A recording medium having a data structure for managing data streams representing multiple reproduction paths of a title,
30 comprising:

a data area storing a clip file of the data stream for each reproduction path such that where the reproduction paths represent a same portion of the title, the portions of the clip files

representing the same portion of the title are interleaved.

16. A method of recording a data structure for managing a data stream representing a title, comprising:

recording navigation data on the recording medium, the
5 navigation data associated with a data stream representing a portion of the title, the navigation data indicating whether the data stream for the portion of the title represents multiple reproduction paths.

17. A method of reproducing a data structure for managing a
10 data stream representing a title recorded on a recording medium, comprising:

reproducing navigation data from the recording medium, the navigation data associated with a data stream representing a portion of the title, the navigation data indicating whether the
15 data stream for the portion of the title represents multiple reproduction paths.

18. An apparatus for recording a data structure for managing a data stream representing a title, comprising:

a driver for driving an optical recording device to record
20 data on the recording medium;

a controller for controlling the driver to record navigation data on the recording medium, the navigation data associated with a data stream representing a portion of the title, the navigation data indicating whether the data stream for the portion of the title
25 represents multiple reproduction paths.

19. An apparatus for reproducing a data structure for managing a data stream representing a title recorded on a recording medium, comprising:

a driver for driving an optical reproducing device to
30 reproduce data recorded on the recording medium;

a controller for controlling the driver to reproduce navigation data from the recording medium, the navigation data associated with a data stream representing a portion of the title,

the navigation data indicating whether the data stream for the portion of the title represents multiple reproduction paths.

FIG. 1

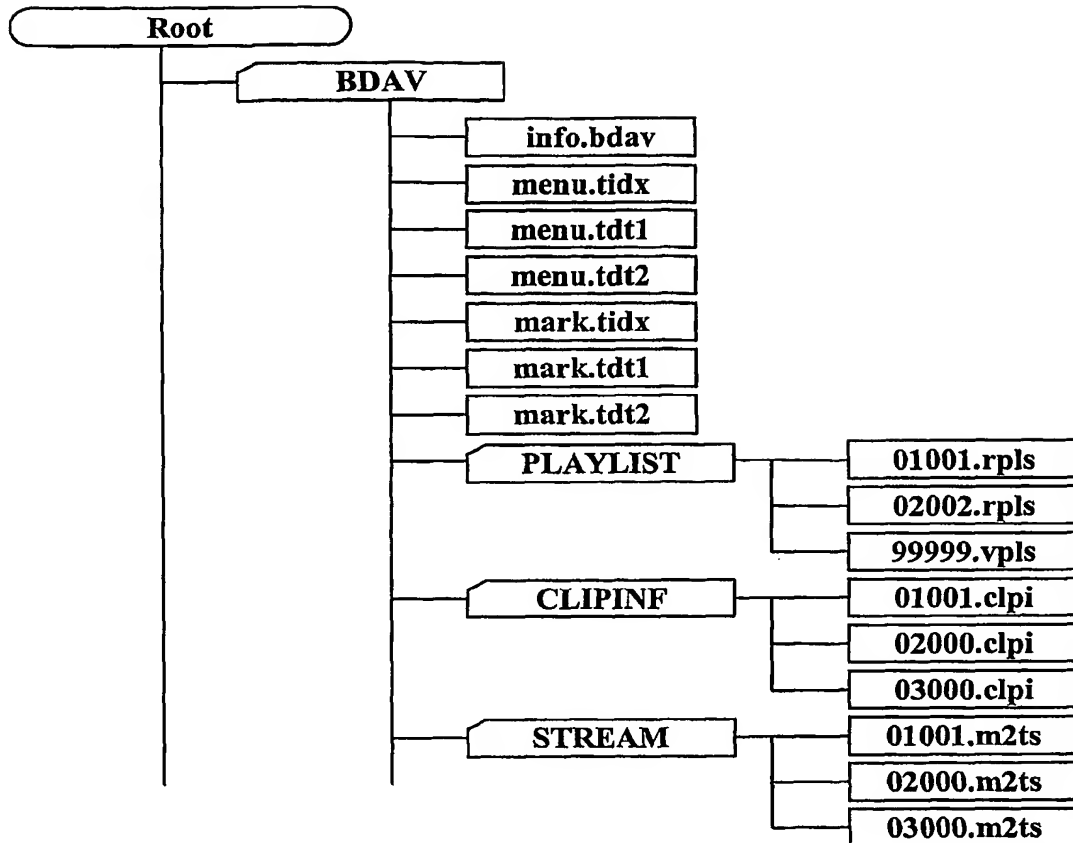


FIG. 2

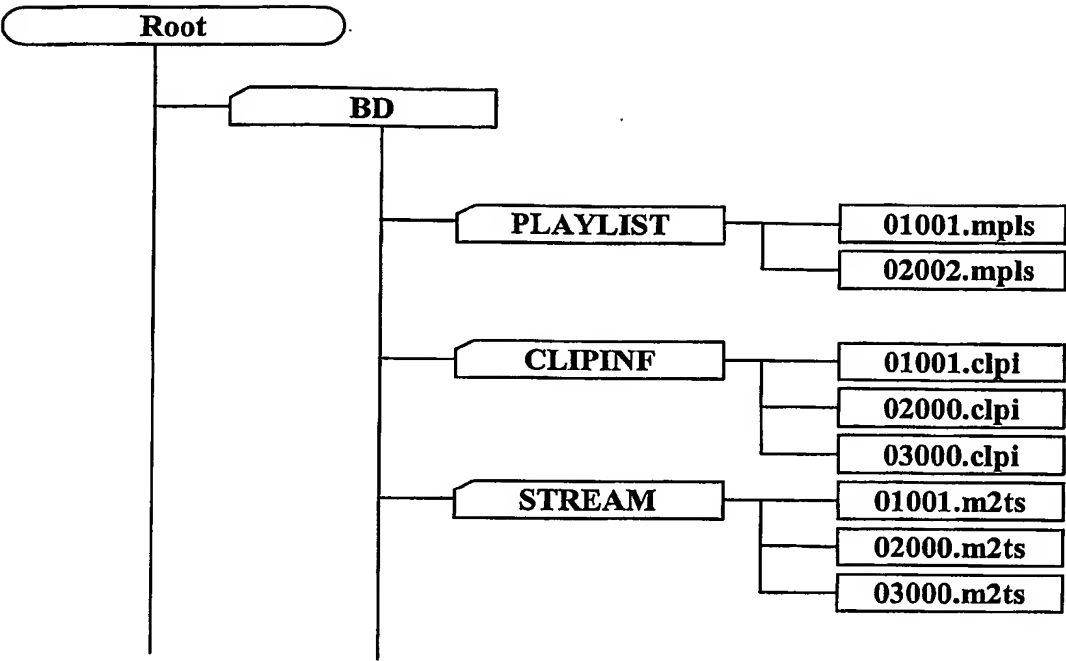


FIG. 3

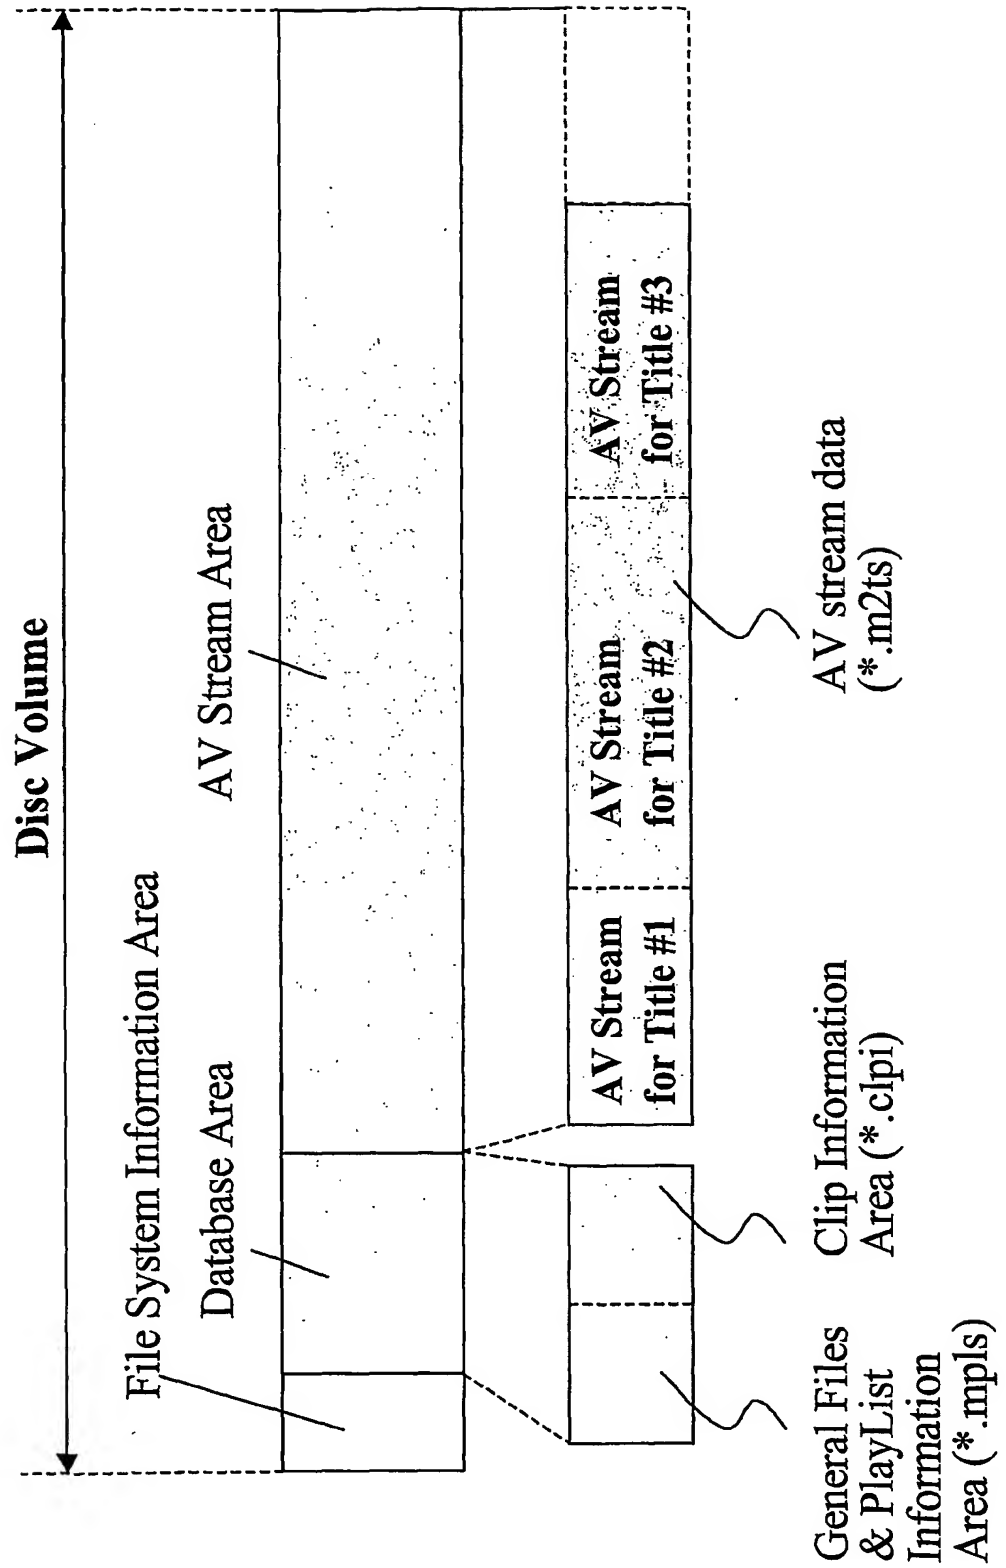


FIG. 5

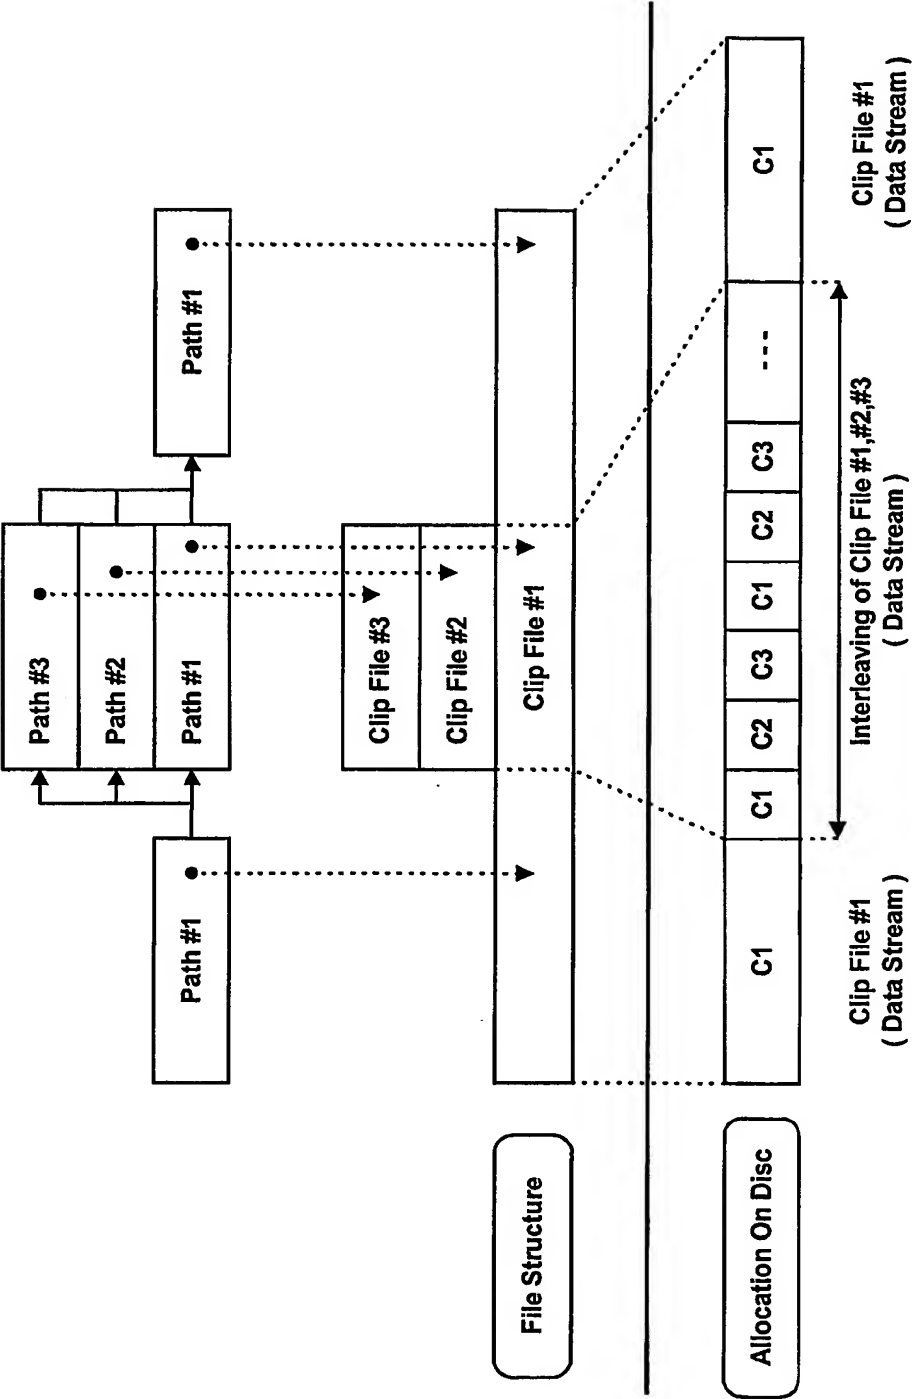


FIG. 6

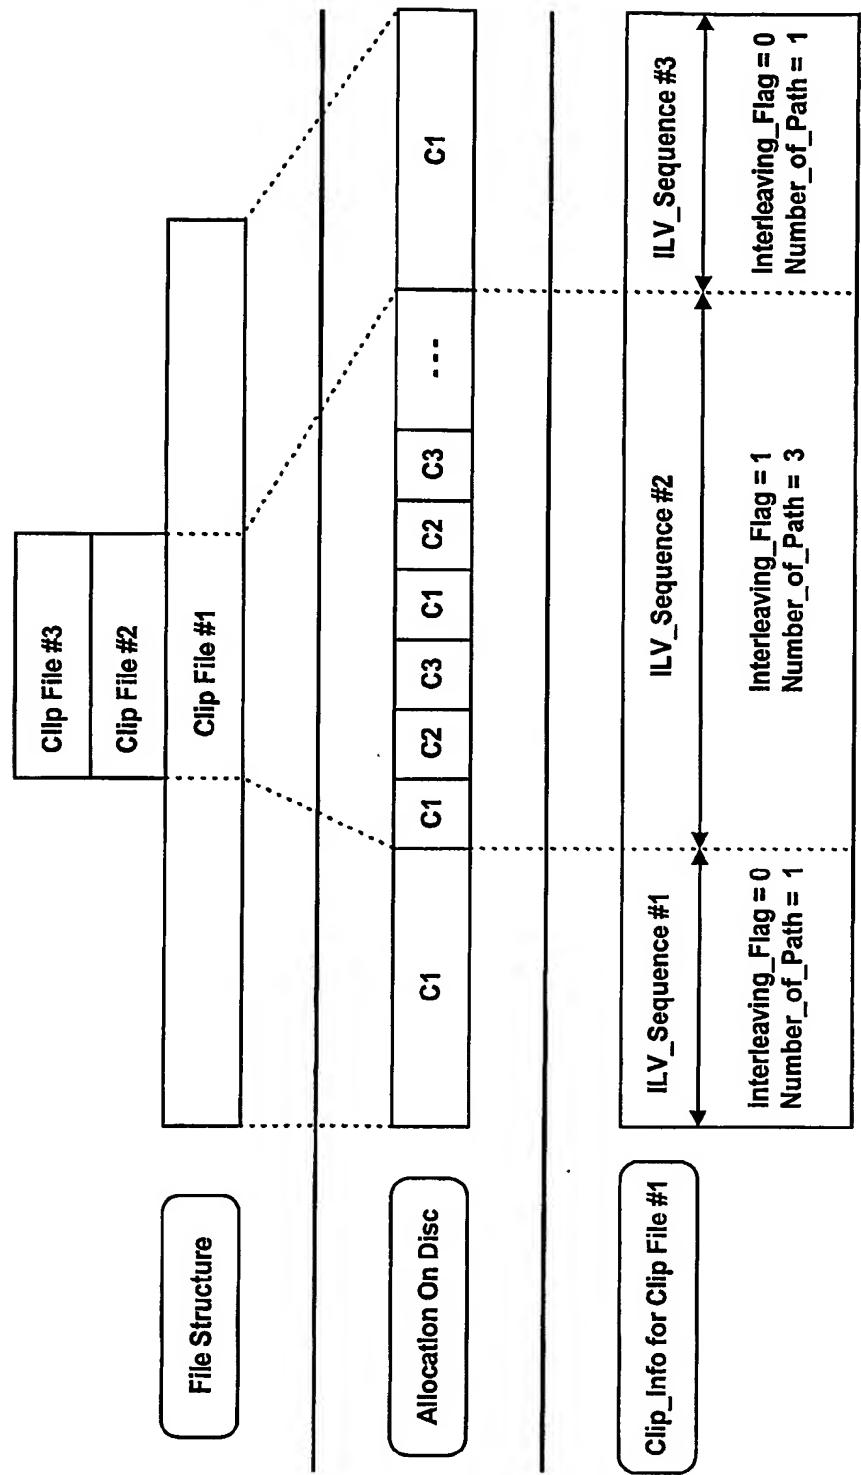



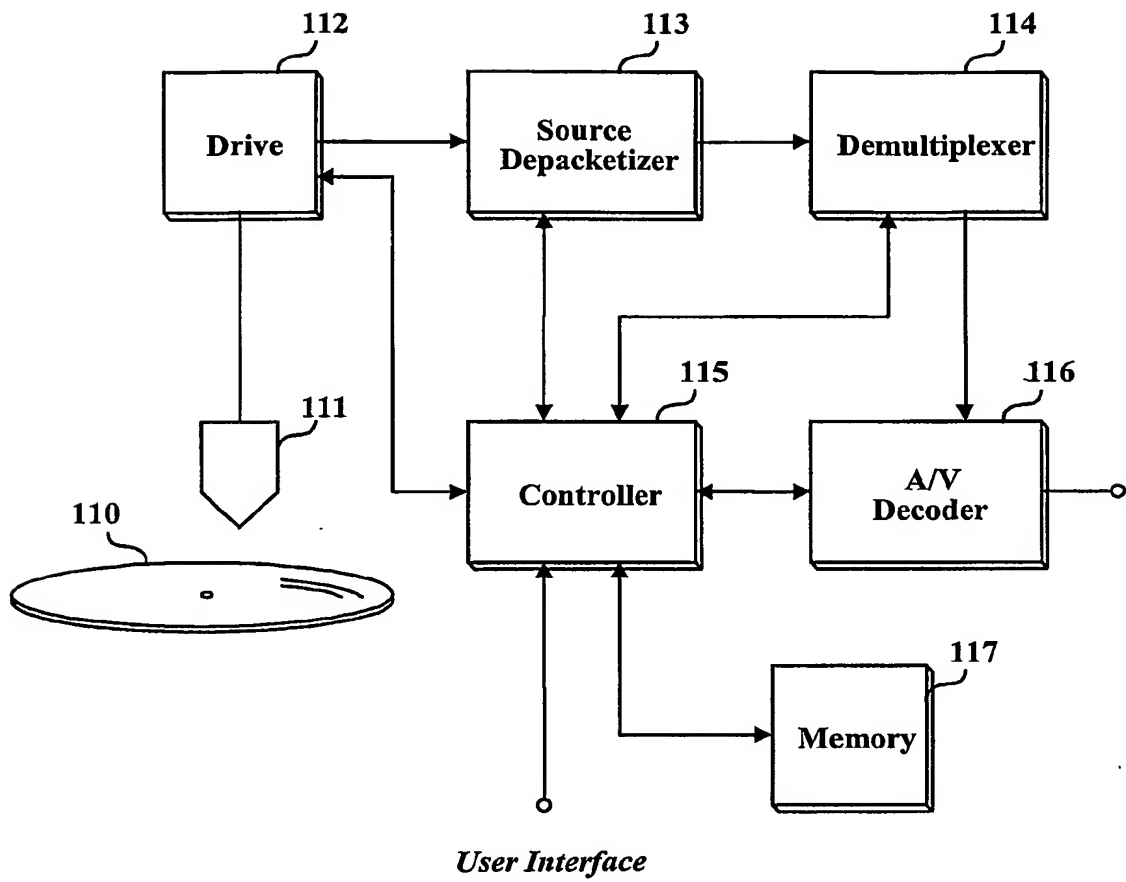


FIG. 7

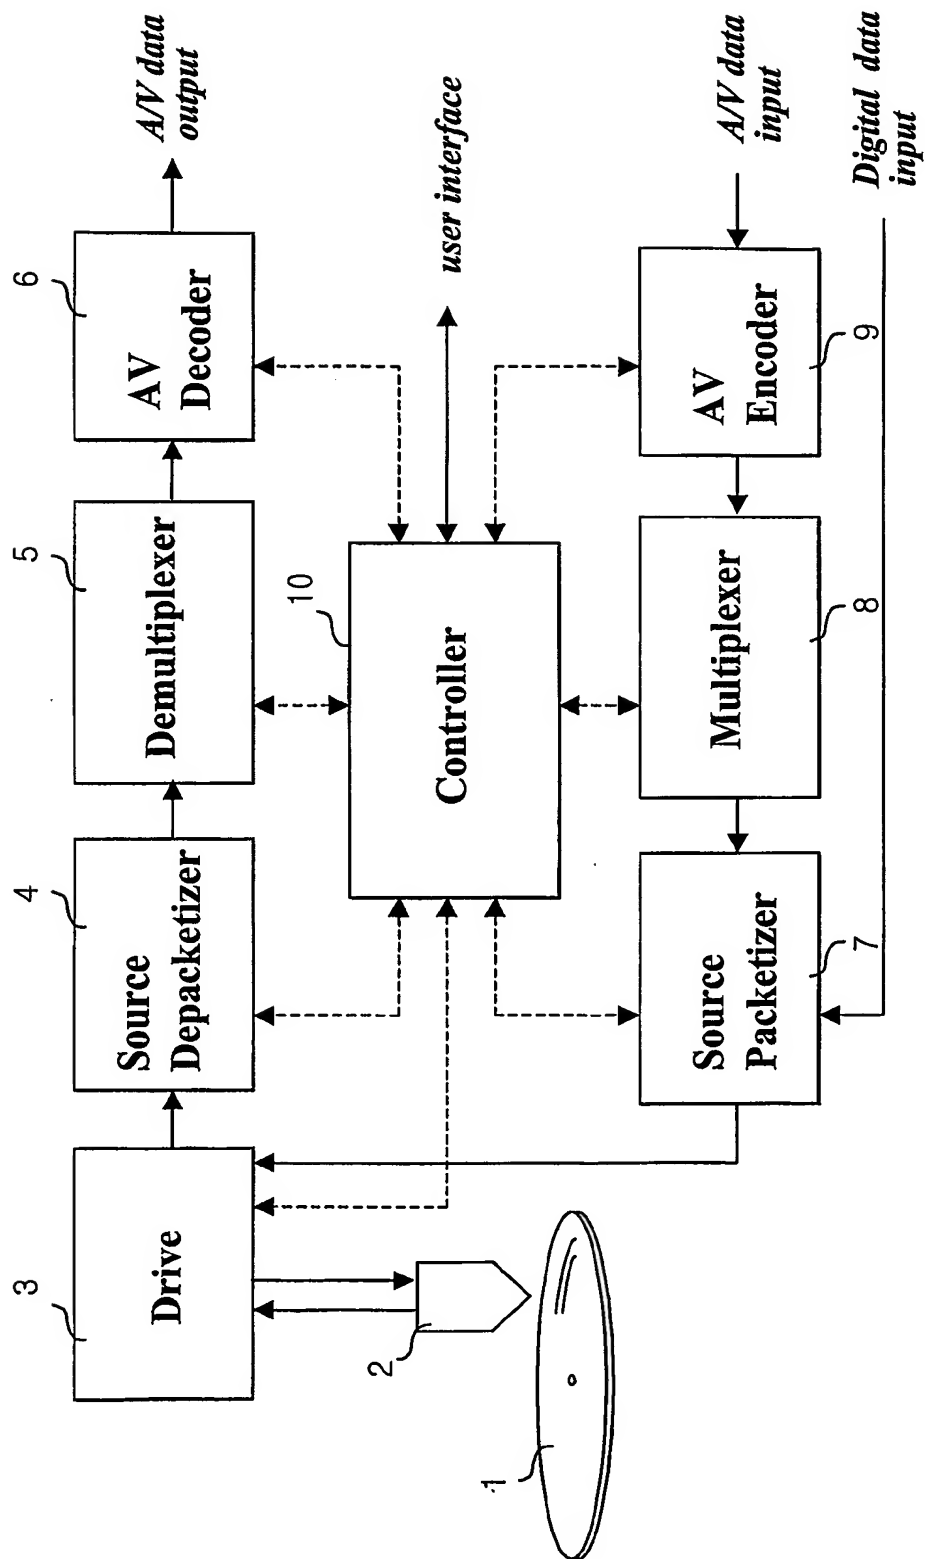FIG. 8



INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2004/000289

A. CLASSIFICATION OF SUBJECT MATTER IPC7 G11B 7/004 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G11B 7/00-G11B 7/24, G11B 20/00-G11B20/24 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched KOREAN PATENTS AND APPLICATIONS FOR INVENTIONS SINCE 1975 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPI, PAJ, "path", "multi", "navigation", "title", "data", "stream"		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, Y	WO 2004-01750 A1 (LG Electronics Co. Ltd.) 11 JUNE 2003 See abstract and claims 1-16.	1, 6, 15, 16, 17, 8, 19
E, Y	KR 2004-30992 A (LG ELECTRONICS CO. LTD.) 9 APRIL 2004 See the whole document.	1, 6, 15, 16, 17, 8, 19
E, Y	KR 2004-290 A (LG ELECTRONICS CO. LTD.) 3 JANUARY 2004 See the whole document.	1, 6, 15, 16, 17, 8, 19
E, Y	KR 2004-30994 A (LG ELECTRONICS CO. LTD.) 9 APRIL 2004 See the whole document.	1, 6, 15, 16, 17, 8, 19
E, Y	KR 2004-41581 A (LG ELECTRONICS CO. LTD.) 17 MAY 2004 See the whole document.	1, 6, 15, 16, 17, 8, 19
	KR 2004-30995 A (LG ELECTRONICS CO. LTD.) 9 APRIL 2004 See the whole document.	1, 6, 15, 16, 17, 8, 19
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 09 JUNE 2004 (09.06.2004)		Date of mailing of the international search report 10 JUNE 2004 (10.06.2004)
Name and mailing address of the ISA/KR  Korean Intellectual Property Office 920 Dunsan-dong, Seo-gu, Daejeon 302-701, Republic of Korea Facsimile No. 82-42-472-7140		Authorized officer SONG, Jin Suk Telephone No. 82-42-481-5694 

22/33

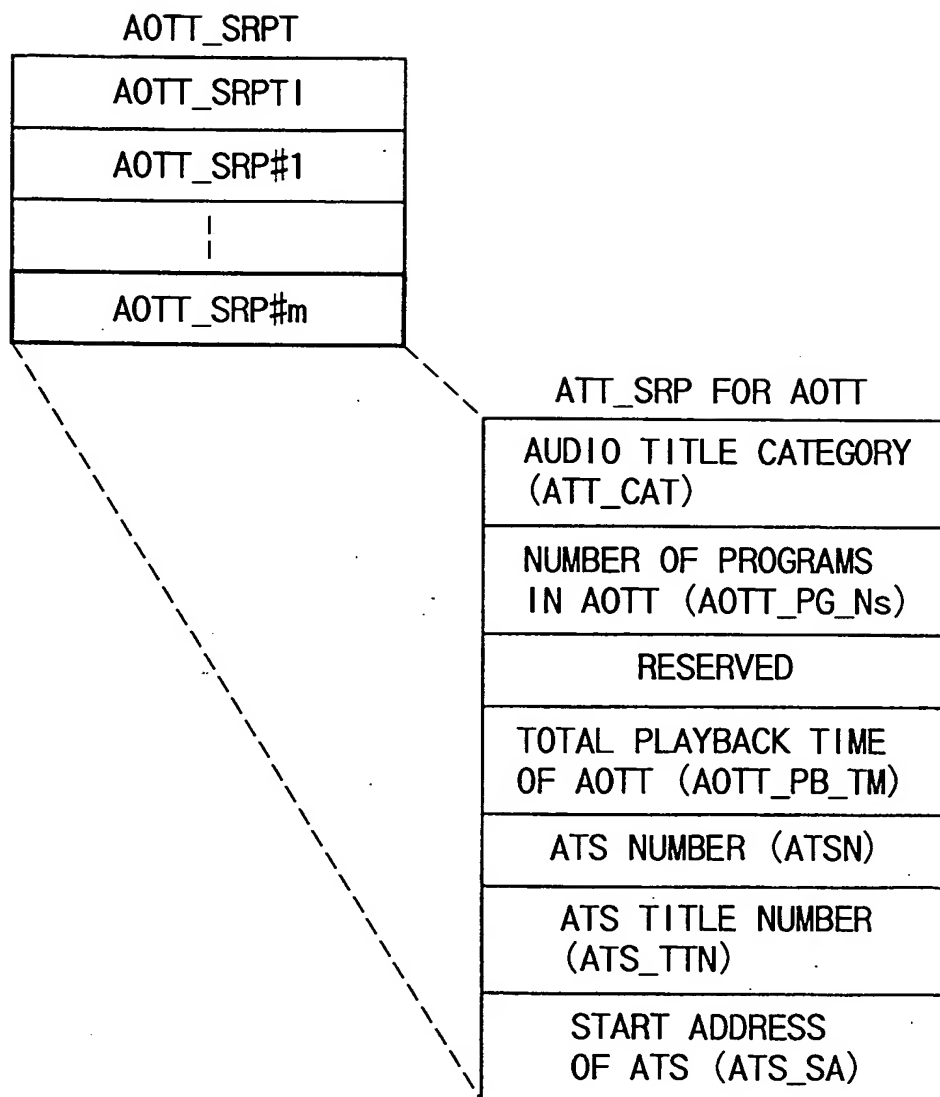


FIG. 22

23/33

NUMBER OF ATT	CONTENTS OF ATT	GROUP OF AOTT (AOTT_GR)		GROUP OF ATT (ATT_GR)	
		AOTT_SRPT	AOTT_GR NO.	ATT_SRPT	ATT_GR NO.
#1	AVTT	NONE	—	FOR AVTT	GR#1
#2	AVTT&AOTT	FOR AOTT	GR#1	FOR AVTT	GR#2
#3	AVTT&AOTT	FOR AOTT		FOR AVTT	
#4	AOTT	FOR AOTT		FOR AOTT	
#5	AOTT	FOR AOTT	GR#2	FOR AOTT	GR#3
#6	AVTT&AOTT	FOR AOTT		FOR AVTT	
#7	AOTT	FOR AOTT		FOR AOTT	
#8	AOTT	FOR AOTT		FOR AOTT	
#9	AVTT	NONE	—	FOR AVTT	GR#4

FIG. 23

24/33

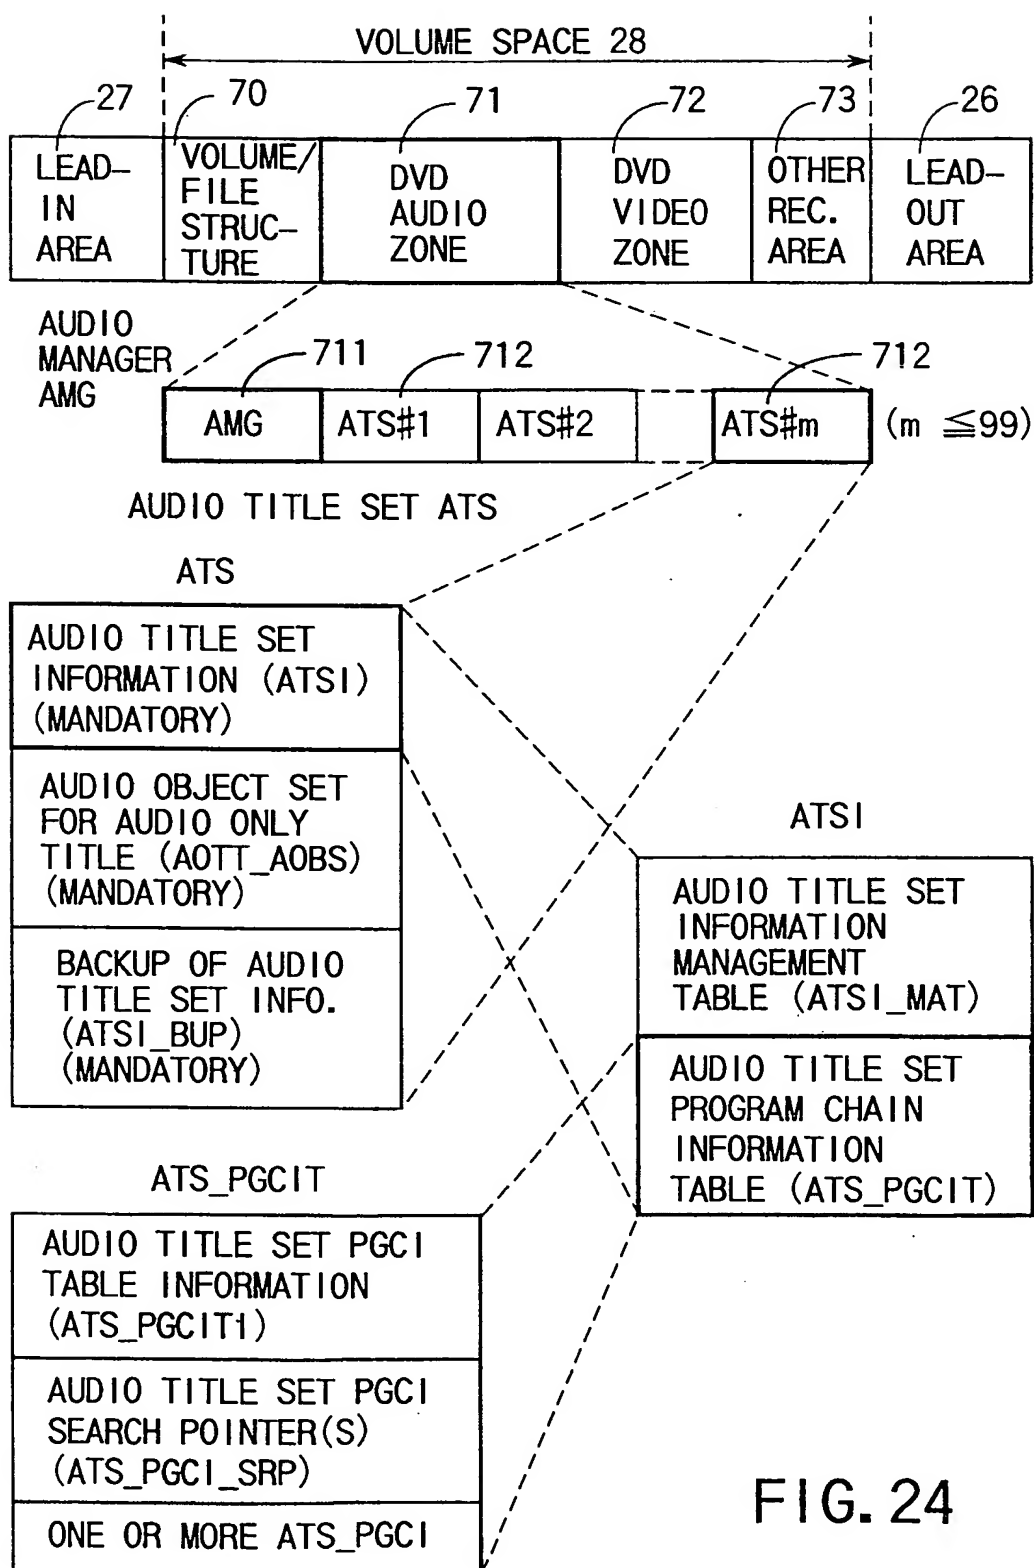


FIG. 24

25/33

AUDIO TITLE SET INFORMATION MANAGEMENT TABLE ATSI_MAT

RBP	SYMBOL/FILE NAME	CONTENTS	BYTES
0 - 11	ATS_ID	ATS IDENTIFIER	12
12 - 15	ATS_EA	END ADR. OF ATS	4
16 - 27	RESERVED	RESERVED	12
28 - 31	ATSI_EA	END ADR OF ATSI	4
32 - 33	VERN	VERSION NUMBER OF AUDIO SPEC.	2
34 - 127	RESERVED	RESERVED	94
128 - 131	ATSI_MAT_EA	END ADDRESS OF ATSI_MAT	4
132 - 191	RESERVED	RESERVED	60
192 - 195	VTS_SA	START ADDRESS OF VTS FOR AOTT	4
196 - 199	AOTT_AOBS_SA/ ----- AOTT_VOBS_SA	START ADDRESS OF AOBS FOR AOTT, OR START ADDRESS OF VOBS FOR AOTT	4
200 - 203	RESERVED	RESERVED	4
204 - 207	ATS_PGCIT_SA	START ADDRESS OF ATS_PGCIT	4
208 - 255	RESERVED	RESERVED	48
256-383	AOTT_AOB_ATR/ ----- AOTT_VOB_ART ----- (#0~#7)	ATTRIB. OF AOBs FOR AOTT, OR ATTRIB. OF AUDIO STREAM OF VOBs FOR AOTT	128
384-671	ATS_DM_COEFT ----- (#0~#15)	COEFFICIENTS TO MIX DOWN AUDIO DATA WITH MULTI- CHANNEL OUTPUT TO 2-CHANNEL OUTPUT	288
672 - 2047	RESERVED	RESERVED	1376
RBP=RELATIVE BYTE POSITION			TOTAL BYTES
			2048

FIG. 25

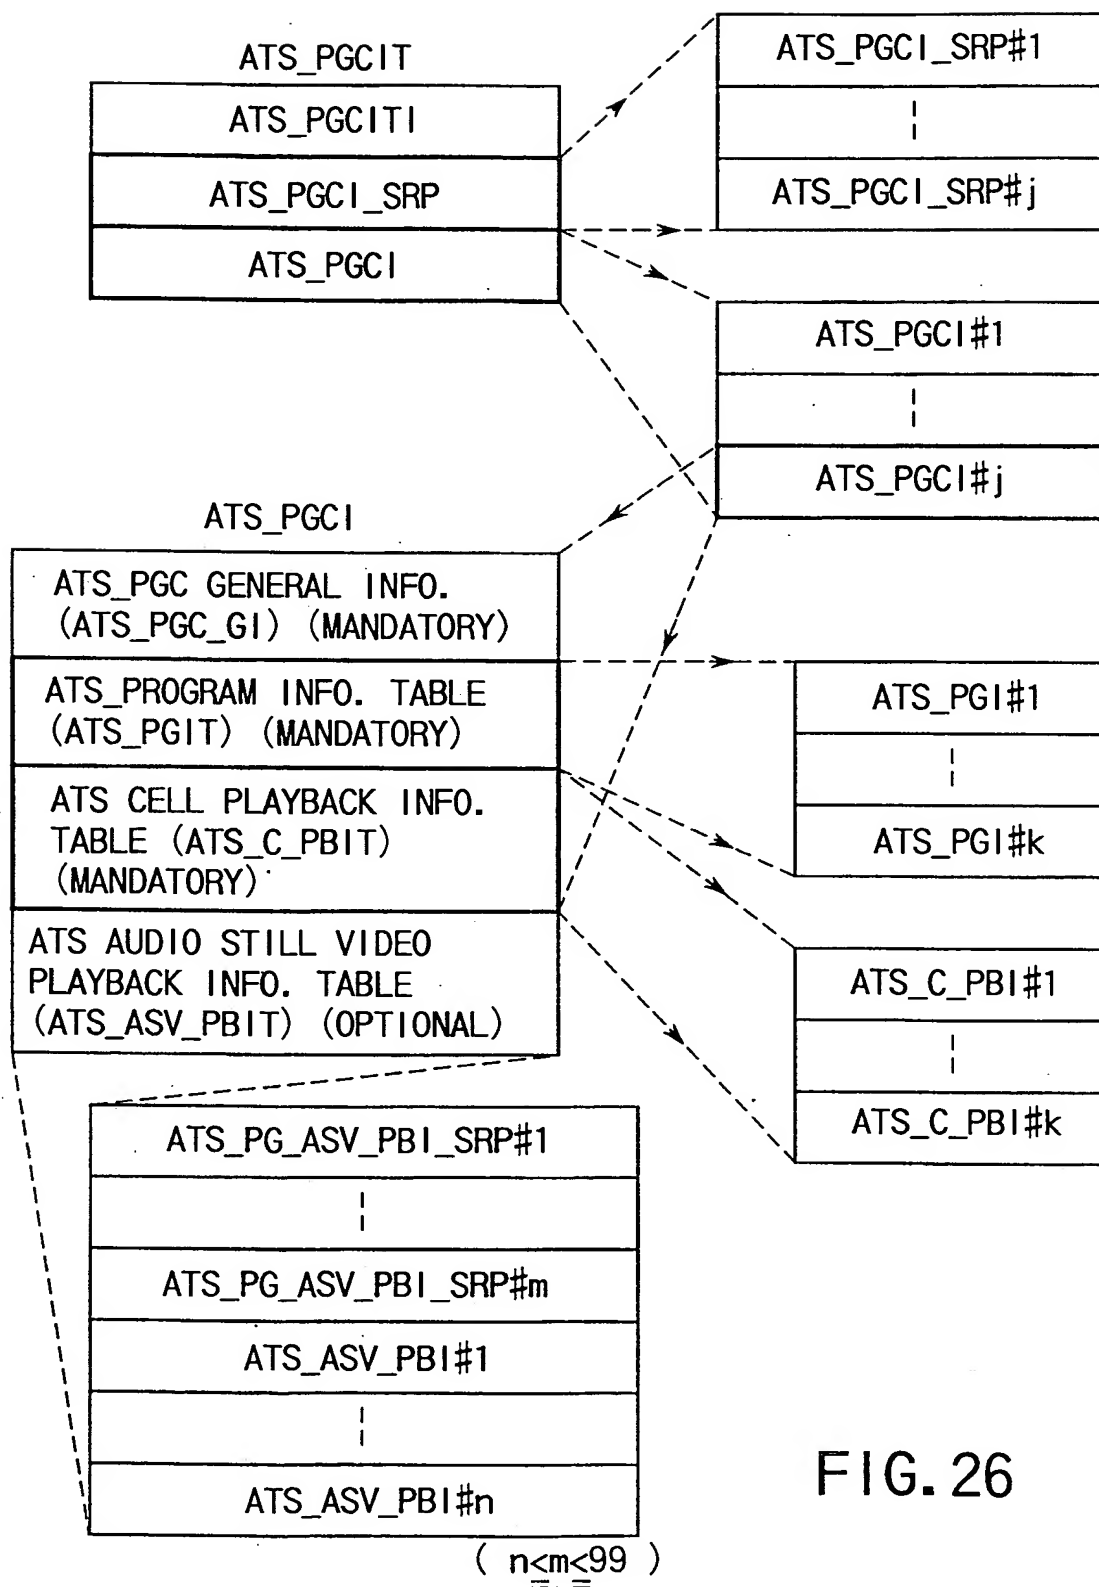


FIG. 26

27/33

AUDIO TITLE SET PROGRAM INFORMATION ATS_PG1

RBP	SYMBOL/FILE NAME	CONTENTS	BYTES
0-3	ATS_PG_CNT	ATS_PG CONTENTS	4
4	ATS_PG_EN_CN	ENTRY CELL NUMBER OF ATS_PG	1
5	RESERVED	RESERVED	1
6-9	FAC_ST_PTM	START PRESENTATION TIME OF FIRST AUDIO-CELL IN ATS_PG	4
10-13	ATS_PG_PB_TM	ATS_PG PLAYBACK TIME	4
14-17	ATS_PG_PA_TM	ATS_PG PAUSE TIME	4
18	RESERVED	RESERVED	1
19	RESERVED	RESERVED	1

RBP=RELATIVE BYTE POSITIONS

FIG. 27

AUDIO TITLE SET CELL PLAYBACK INFORMATION ATS_C_PBI

RBP	SYMBOL/FILE NAME	CONTENTS	BYTES
0	ATS_C_I_XN	INDEX NO. OF ATS_C	1
1	ATS_C_TY	ATS_C TYPE	1
2-3	RESERVED	RESERVED	2
4-7	ATS_C_SA	START ADDRESS OF ATS_C	4
8-11	ATS_C_EA	END ADDRESS OF ATS_C	4

RBP=RELATIVE BYTE POSITIONS

FIG. 28

28/33

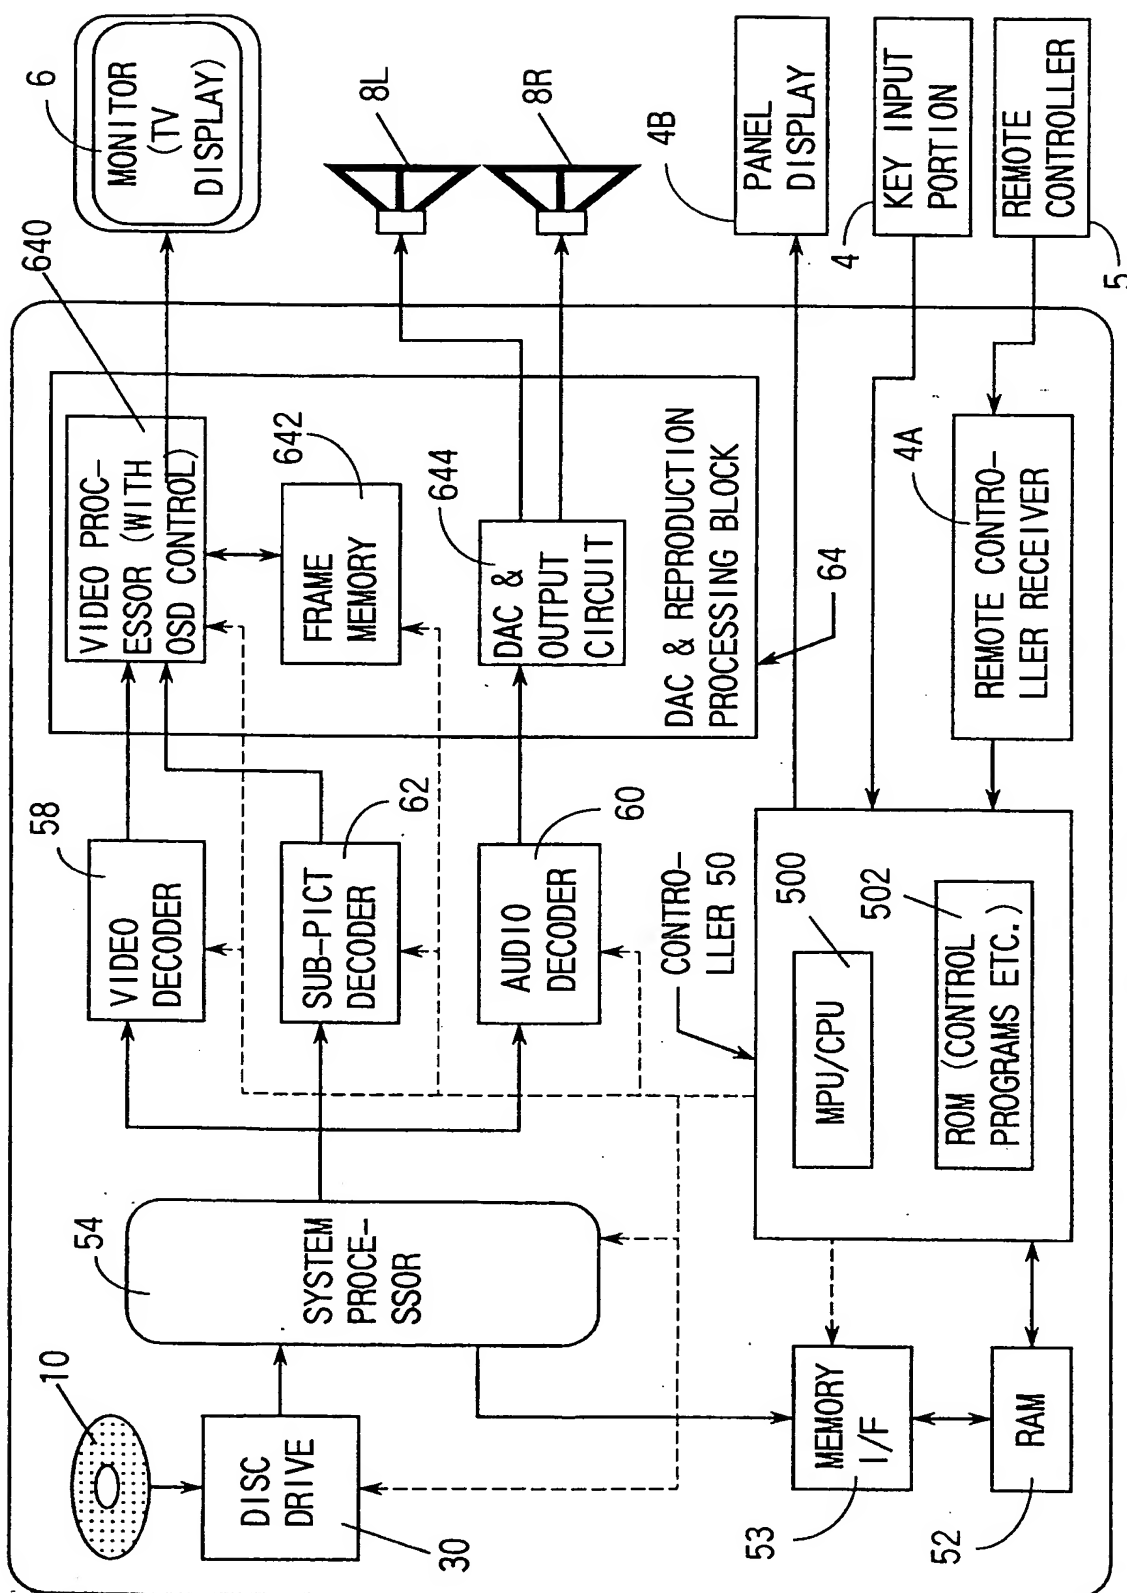


FIG. 29

29/33

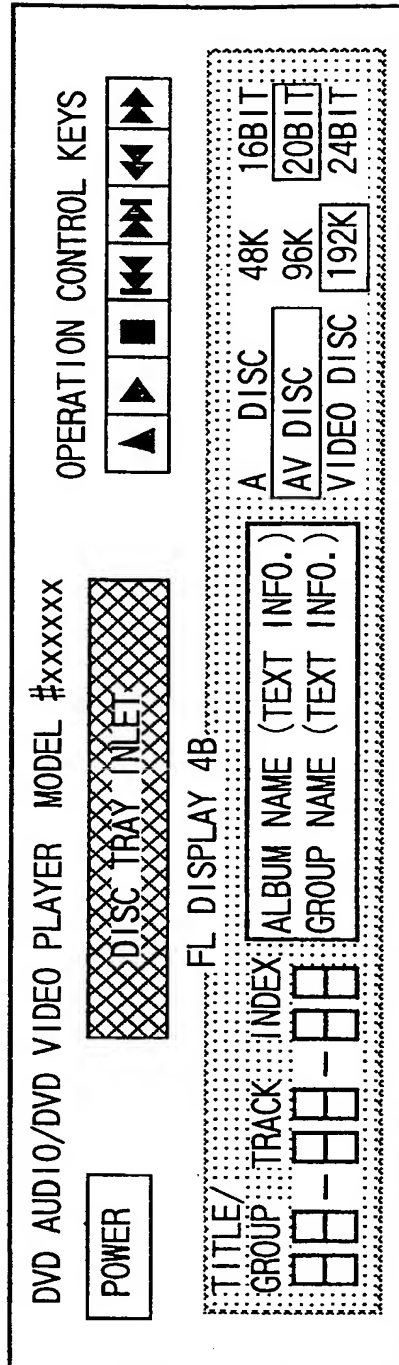


FIG. 30

30/33


1ST INFO.
RECORDING
LAYER 10DOUBLE-LAYERED
OPTICAL DISC "OD"

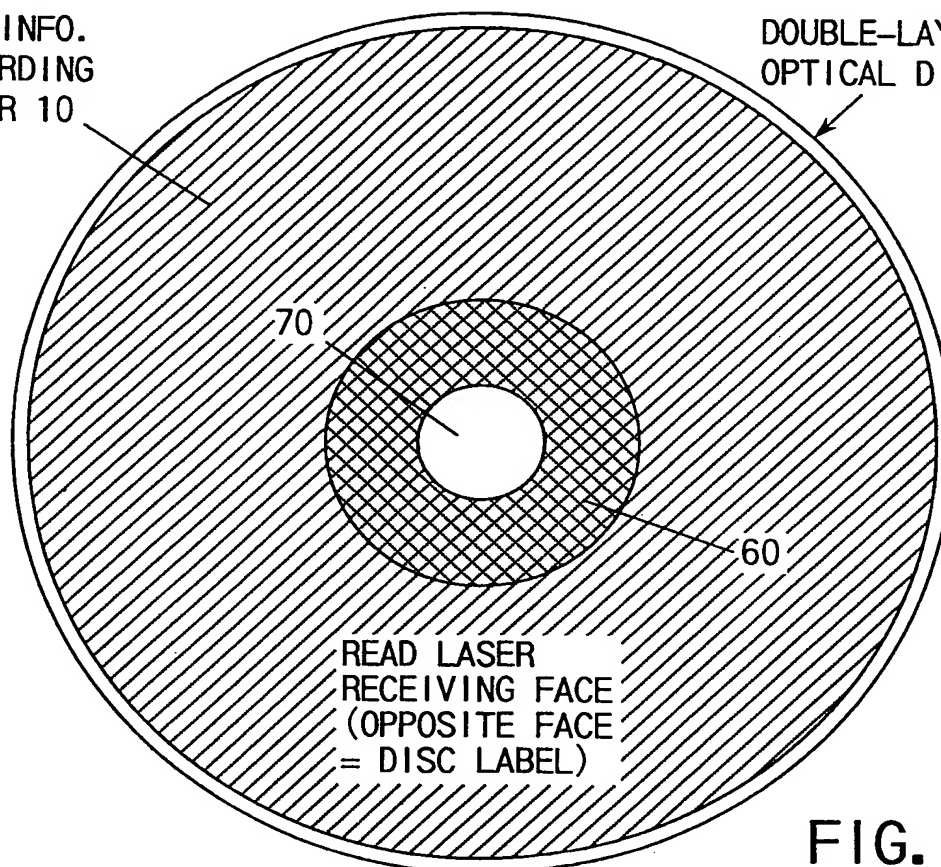FIG. 31

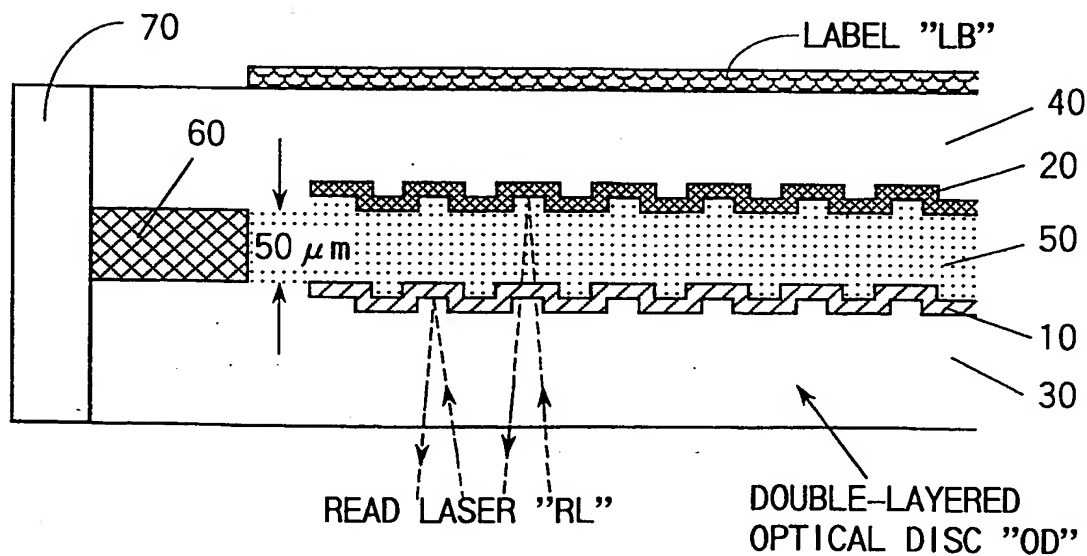


FIG. 32

31/33

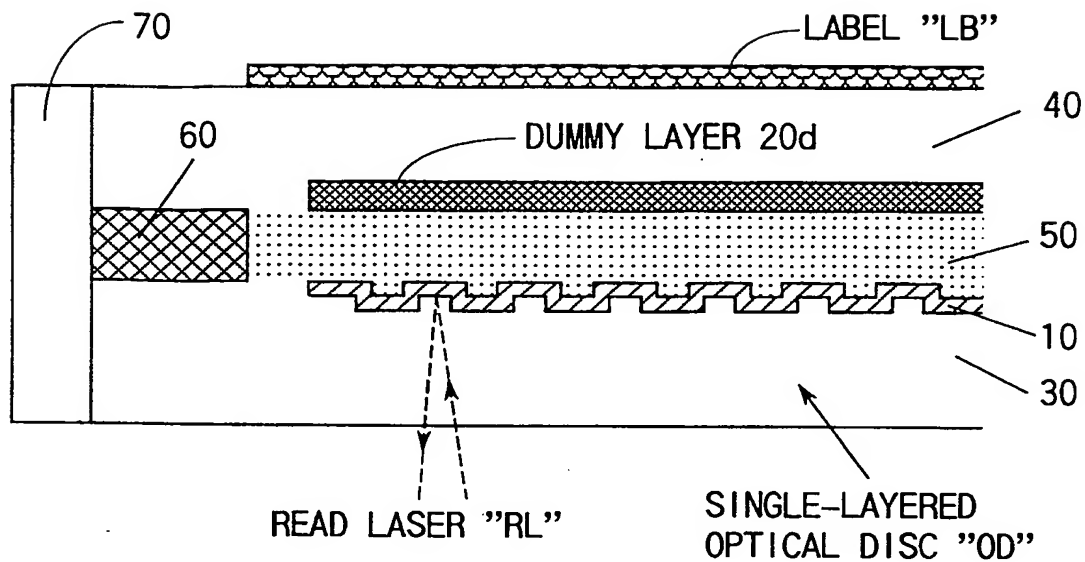


FIG. 33


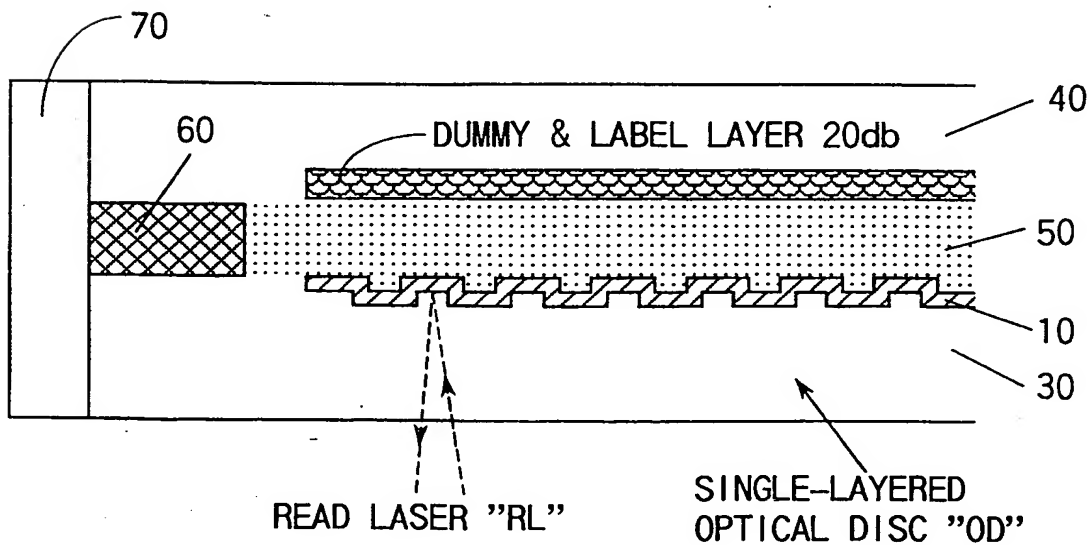


FIG. 34

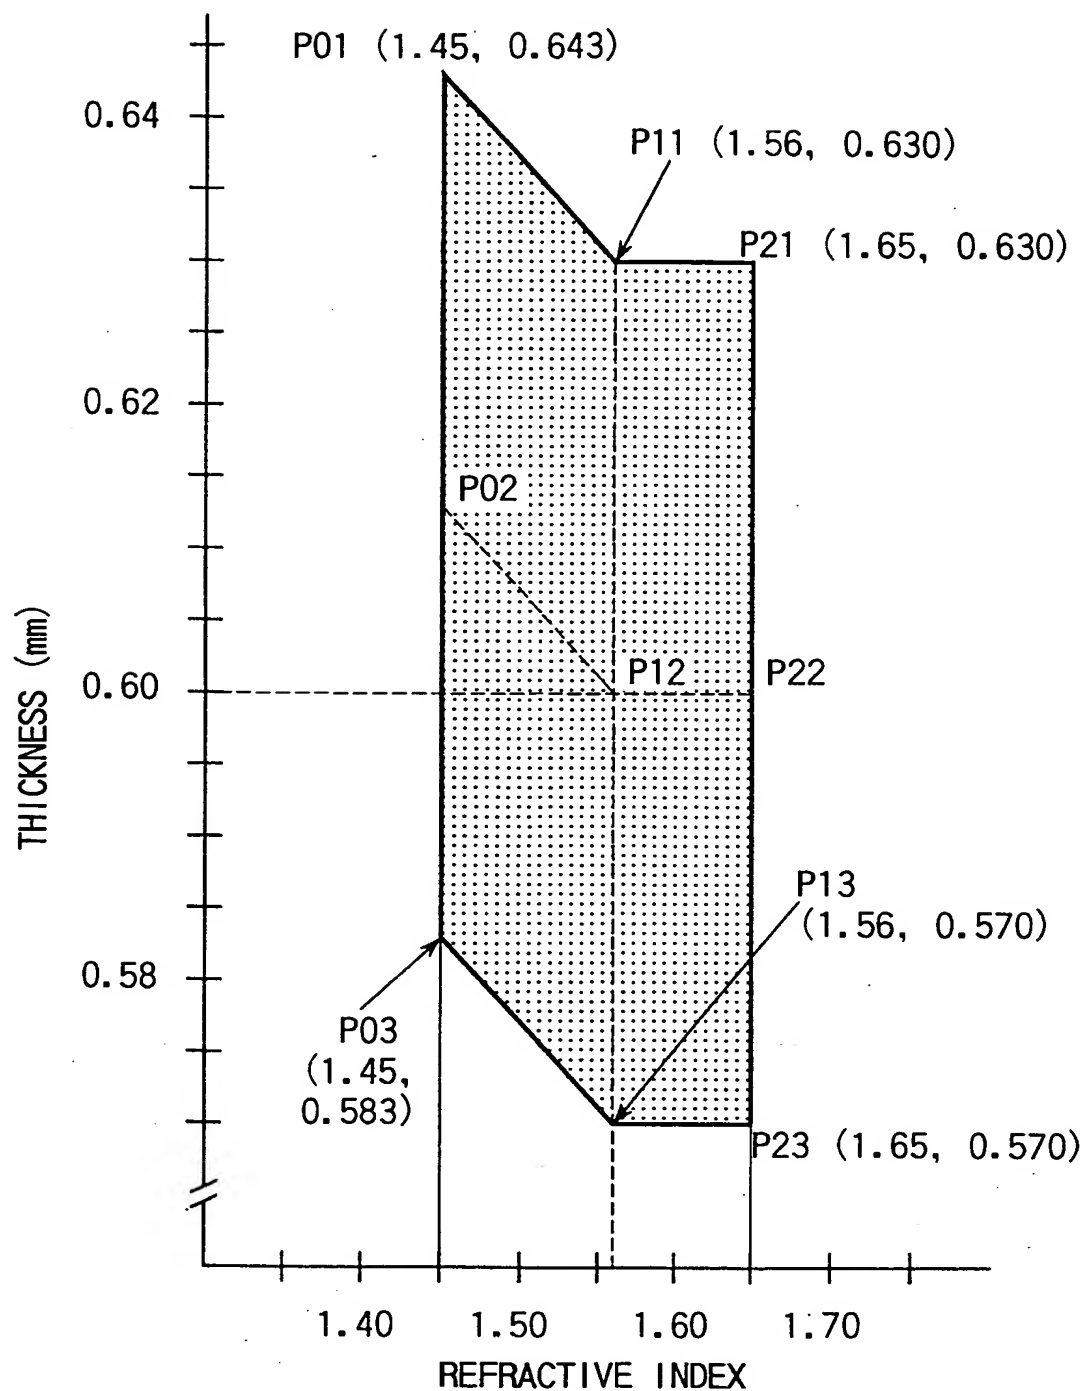
32/33



SUBSTRATE THICKNESS AS A FUNCTION OF
REFRACTIVE INDEX FOR SINGLE LAYERED SIDE

FIG. 35

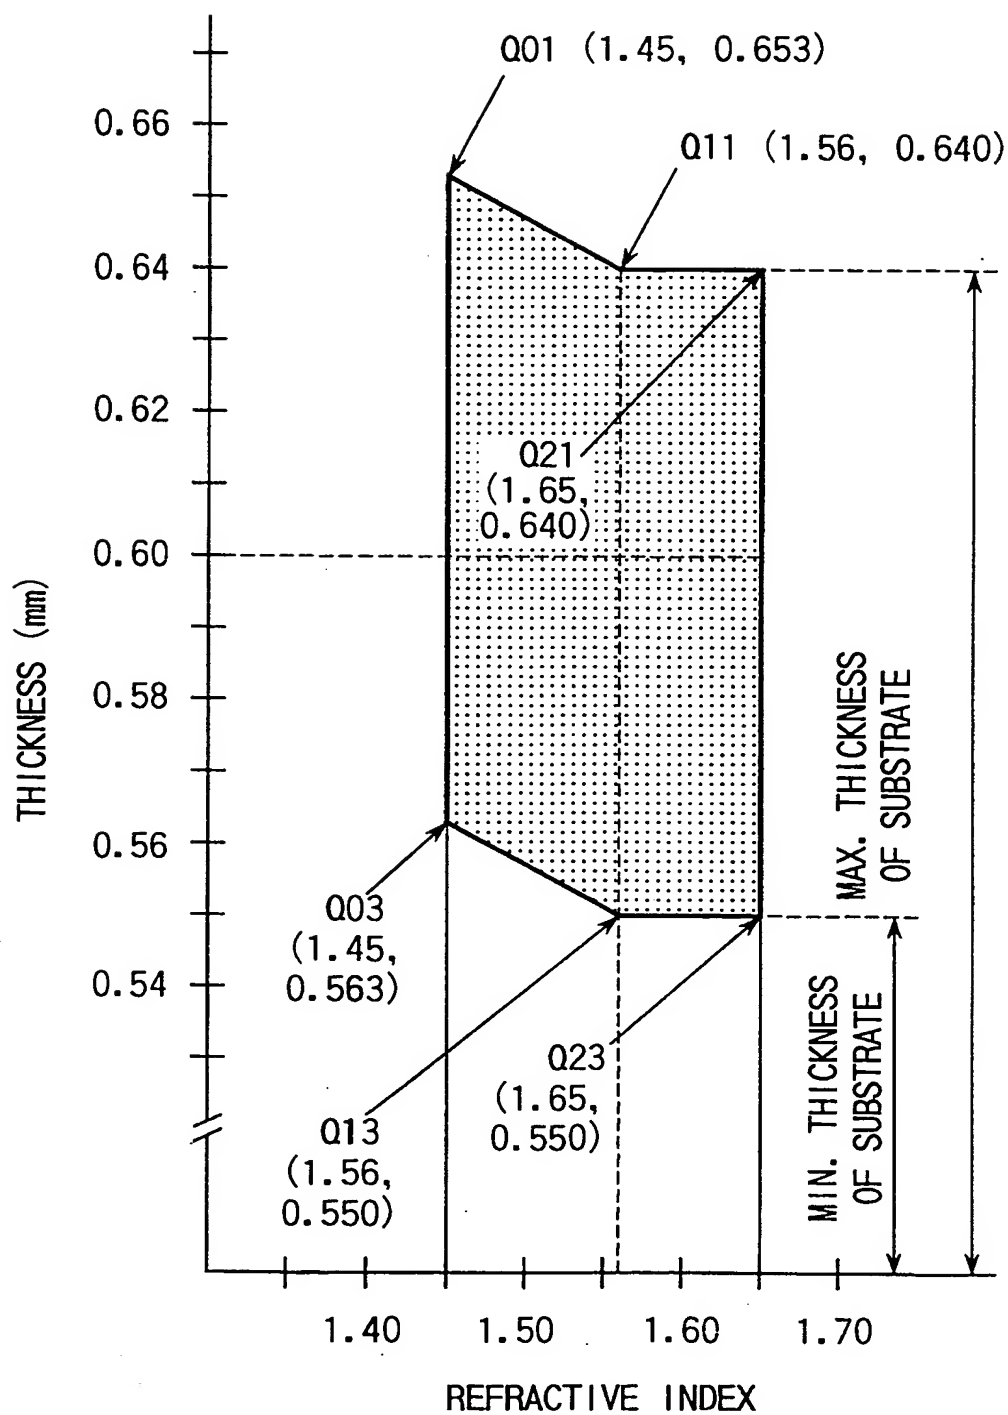33/33



THICKNESS OF SUBSTRATE/SPACE LAYER AS A FUNCTION OF
REFRACTIVE INDEX FOR DUAL LAYERED SIDE

FIG. 36